



Parameter	Unit	Value
Total length	mm	6640
Total width	mm	2540(including tire width)
The length of the wheel tray	mm	5000
The width of the wheel tray	mm	1940
The minimum distance between the vehicle tray and the mudguard	mm	230
Fall to the lowest height	mm	100
Traction height	mm	430(Adjustable)
Maximum load capacity	kg	2500
Self-weight	kg	980
Braking form	-	Four-wheel 10-inch electric brakes
Wheel rim	-	Steel ring (aluminum alloy ring optional+\$100)
The number of tires	-	4(Spare tire optional)
Tire specification	-	195/70R15C
Lifting and lowering form	-	Chassis hydraulic lifting
Battery	V	12 volts, 80AH
Dynamic form	V	12-volt hydraulic lifting
Control mode	-	Remote control for lifting and lowering (manual option available)
Maximum working pressure	bar	120
Electric Winch	pounds	12000(Optional+\$280)
Spare tire	-	Optional
Suspension	-	Four-wheel independent suspension

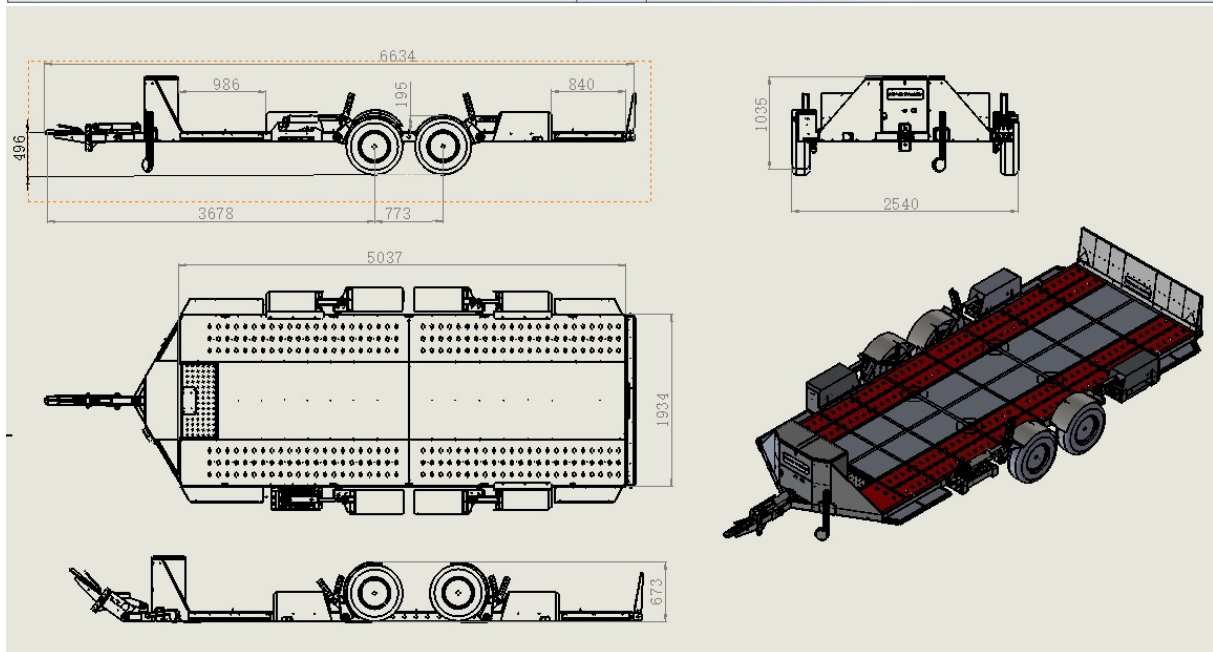

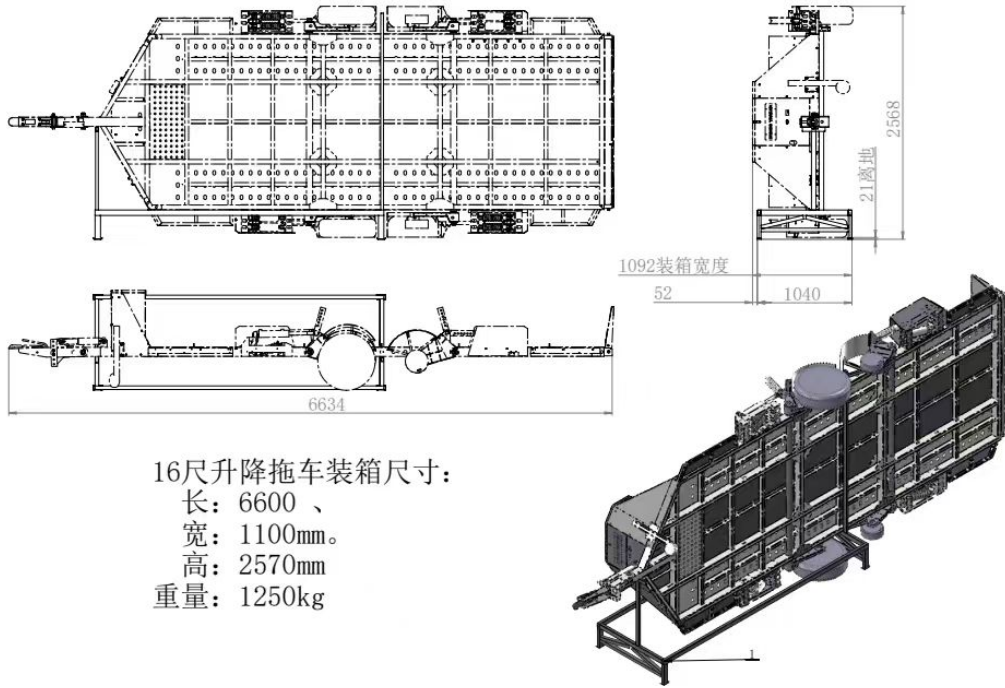

16尺升降拖车装箱尺寸：

长：6600、

宽：1100mm。

高：2570mm

重量：1250kg